Pioneer

KIOSK INSTALLATION INSTRUCTIONS

CT 17

MATERIALS NEEDED:

- Level
- Phillips Head Screw Driver – Long Thin (See Picture Below)
- Battery Power Drill
- ¼" Drill Bit (See Picture Below)
- ¼ Phillips Head Bit (See Picture Below)
- Tool Magnetizer For Screw Driver (See Picture Below)
- Screws (QTY 4, #8 Screw, 1¼) (See Picture Below)
- Anchors (QTY 4, #8) (See Picture Below)
- Pencil

©Pioneer Solution, Inc. 2025

Support@PioneerSolution.com
(909) 468-9757 x2

STEP 1: Install Wall Mount Plate

a.) Remove the wall mount plate from the back of the kiosk.

Wall mount plate is fastened to the kiosk with four screws (two on each side). These screws must be unscrewed before removing the plate from the kiosk.

b.) Position the wall mount plate directly over the power outlet on the wall and check for level.

The wall mount plate corner must align directly with the side of the outlet cover. See picture.

c.) Mark holes for drilling with a pencil after checking for level on each side.

d.) Drill holes using a ¼" drill bit.

e.) Place anchors in drilled holes and tap with the back of a screwdriver handle until flush with the wall.

f.) Fasten the plate to the wall using #8 screws and a cordless drill with a Phillips head bit.

©Pioneer Solution, Inc. 2025
Support@PioneerSolution.com
(909) 468-9757 x2

STEP 2: Install power cord and power bracket to kiosk

a.) Remove flange from back of kiosk and tuck in orange PS2 extension





b.) Prepare brick for installation

Position power brick with cord in upper right hand location

©Pioneer Solution, Inc. 2025

Support@PioneerSolution.com
(909) 468-9757 x2

c.) Place bracket over power brick (Note: circle in upper right and corner)

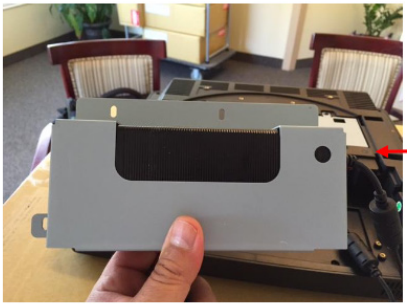

d.) Insert 1' power cord into power brick on left hand side (cord should hang down)

©Pioneer Solution, Inc. 2025
Support@PioneerSolution.com
(909) 468-9757 x2

STEP 3: Install power brick module to back of kiosk

a.) Align screw holes on top of bracket with holes on kiosk
Ensure that the hole are at the bottom of the slot as pictured below.

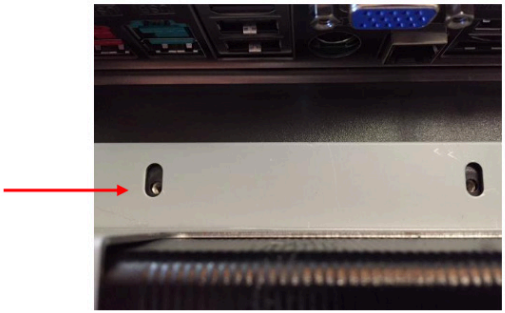

b.) Screw bracket to kiosk using the 2 black screws provided

Securing wire to the back of the unit

c.) Secure cable to bracket With plastic straps and wrap cable up In cavity.

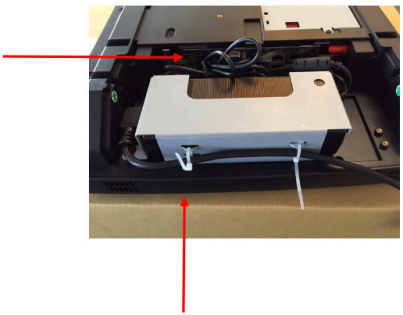

©Pioneer Solution, Inc. 2025
Support@PioneerSolution.com
(909) 468-9757 x2

STEP 4: Fix kiosk to wall bracket

a.) Align 4 slots on back of kiosk with hooks on wall mount plate.

b.) Fasten kiosk to wall mount plate with 4 screws (small black screws provided)



©Pioneer Solution, Inc. 2025

Support@PioneerSolution.com
(909) 468-9757 x2